
294200.20NVC

rev 0

MAXYMUM 20bar Inert Gas NevocW30x2Rhi ISO 5145-Out G3/8



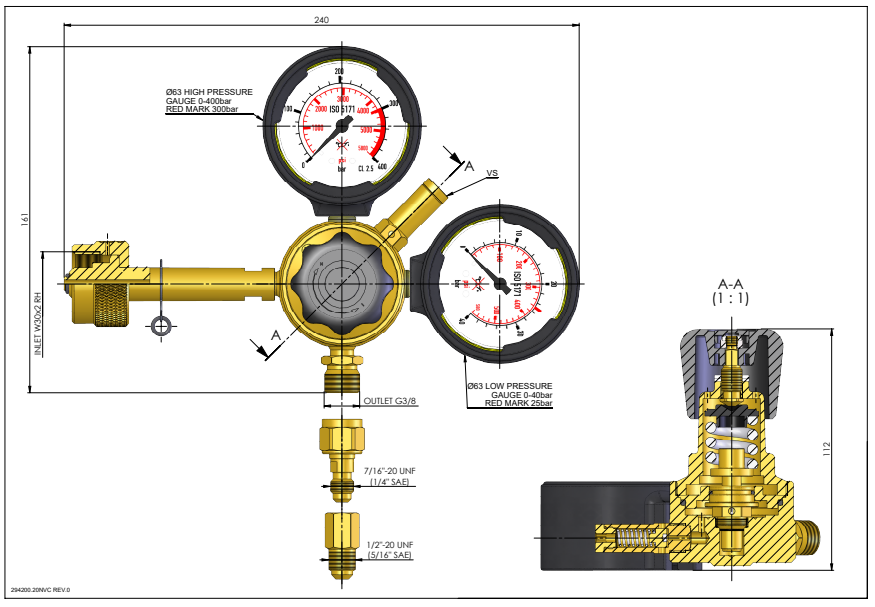

Product	Pressure Reducer
Model	Maxymum with connection Nevoc for Inert Gas ISO5145
Type	2 gauges (HP-LP)
Custom Tariff	84811099
Item Nr	294200.20NVC
Barcode	8011971354247
Used gases	INERT Gas
Standard	Approval APRAGAZ n°11/IT/2626-0 REV 0 - UNI EN ISO2503
Marking	EN ISO 2503 - N - n°OP - P1 300BAR - P2 60BAR - Q1 150M3H-OXYTURBO SRL - MADE IN ITALY
Class of reducer	K 5
Inlet pressure	Until 300bar
Rated outlet pressure	20bar
Standard delivery Flow	60m3/h at 20bar
Bottle Connection	ISO5145(300bar) foro Inert Gas
Double reduction fitting	Double reduction fitting (G3/8"f-1/4SAE-m)-(1/4SAE-f-5/16SAE-m)
LP gauge	ø63 0-6bar red mark at 4bar 32Lt/min
Outlet connector	G3/8"BSPT with conical seat
Optional device	/
HP Gauge	ø63 - 0-400 bar Red Mark at 300 bar
LP Gauge	ø63mm 0-40bar red mark at 25bar
Protection Gauge	Black Cover
Product weight	1,8kg
Manufacturer	Oxyturbo Spa