
oxyturbo®	485300	rev 0

BOMBOLA CO2 M10x1 60bar 390gr
senza piedino



NOT REFILLABLE TPED/TPER STEEL CYLINDER

Technical Data

NOT REFILLABLE TPED/TPER STEEL CYLINDER

Material: high strenght steel alloy E355M
Cylinder Thread: M10x1
Finishing: color coated

Labelling: personalized label on demand
Packaging: personalized box on demand

Product Certification

Technical Standard: EN ISO 11118:2015

ITALCERT LRQA

PW 116 PH 174 BAR 0,95 L
TT 0426 PH ISO 11118:2015 I
ρ 0038 EN ISO 11118:2015 UK
NON RICARICARE - DO NOT REFILL
BATCH N° xxxx
DATE xxxxxxx



Sizes and Specifications

TYPE	VOLUME (L)	WORK PRESSURE (bar)	DIAMETER (mm)	HEIGHT (mm)	WEIGHT (kg)	CO2 (kg)	N2O (kg)	O2, HE, N2, mix (L)
EU165D70-0.55L	0.6	110	70	197	0.7	0.36	0.39	61
EU165D70-0.65L	0.65	110	70	224	0.8	0.4	0.42	72
EU165D70-0.92L	0.92	110	70	295	1.0	0.56	0.6	101
EU165D70-0.95L	0.95	110	70	307	1.1	0.58	0.62	105
EU165D70-1.42L	1.4	110	70	439	1.6	0.86	0.923	156
EU174D70-0.55L	0.6	116	70	197	0.7	0.38	0.4	64
EU174D70-0.65L	0.65	116	70	224	0.8	0.41	0.43	75
EU174D70-0.95L	0.95	116	70	307	1.1	0.6	0.63	110
EU174D70-1.42L	1.4	116	70	439	1.6	0.9	0.95	165
With feet	-	-	-	+ 0,5	-	-		
With polymer base	-	-	-	+ 1	-	-		

* Any of the above mentioned sizes

Transport Classification

UN No.	TRANSPORT CLASSIFICATION DESCRIPTION	CLASSIFICATION	LABELS	DANGER
1006	COMPRESSED ARGON	1A	2.2	ASPHYXIATING
1013	CARBON DIOXIDE	2A	2.2	ASPHYXIATING
1046	COMPRESSED HELIUM	1A	2.2	ASPHYXIATING
1066	COMPRESSED NITROGEN	1A	2.2	ASPHYXIATING
1072	COMPRESSED OXYGEN	1O	2.2+5.1	OXIDISING

Handling – Storage – Disposal

Gas-based containers cannot be directly exposed to sunshine rays, nor be closed to heat sources or in places where temperature can reach 50°C or more.
Ensure proper ventilation (natural or forced) where cylinders are stored and/or used.
Carefully handle the cylinders thus avoiding violent collisions between them or against surfaces, as well as falls and other mechanical strains susceptible to damage their integrity.
Completely empty bottle should be disposed with other ferrous metals or according to local regulation


System Certification

SISTEMA DI GESTIONE CERTIFICATO ITALCERT UNI EN ISO 9001
SISTEMA DI GESTIONE CERTIFICATO ITALCERT UNI EN ISO 14001

100% Made in Italy

EUROTRE S.R.L. Socio Unico
Via A. Volta 12/13
42024 CASTELNOVO DI SOTTO (RE)
ITALY
info@eurotre.re.it

Rev. 2 – Dic. 7, 2023

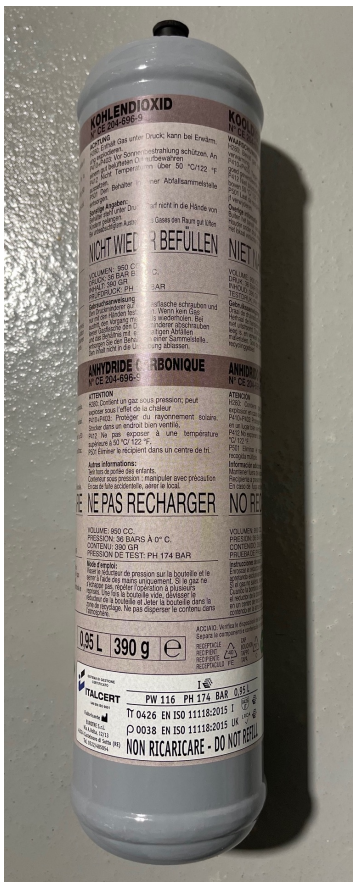

Descrizione Scheda prodotto	
Prodotto	Bombola usa e getta M10x1
Modello	CO2
Tipo	Usa e getta
Codice doganale	28112100
Codice a barre	8056300371908
Gas di riempimento	CO2 (Diossido di Carbonio UN1013)
Volume/Peso contenuto	0,95Lt - 390gr
Pressione di riempimento	60bar (PW116 - PH174bar)
Contenitore	Recipiente a pressione omologato T-PED
Valvola	M10x1 rhe - con dispositivo automatico di chiusura
Omologazione/Norma	Certificazione TUV SUD
Marcatura articolo	n° lotto - mm/aa
Peso	1,5kg
Produttore	Oxyturbo spa